


Delphin - Take Baseplates



DELPHIN - TAKE BASEPLATES

The universal baseplates suit every machine and they are very easy to set up. They are available in hydraulic or pneumatic operation.

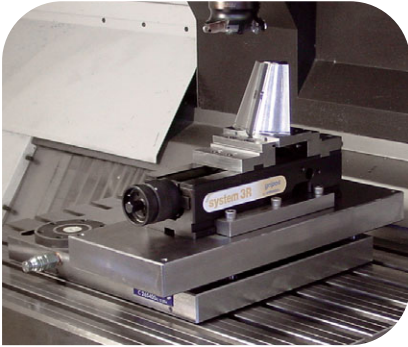

Delphin baseplates

The universal Delphin plates

- Baseplate with hydraulic (HSP) or pneumatic (PSP) chucks
- Delphin Take 4 = 4 PSP or 4 HSP chucks
- Delphin Take 6 = 6 PSP or 6 HSP chucks
- Centre distance 250 mm
- Universal hole pattern for table mounting
- Attractive price!




Specifications

- Material: steel, heat pre-treated and ground
- Defined hole pattern suitable for all machines
- Central bore and milled edge for quick positioning


Take 4 - pneumatic C 242 400

- 4x PSP chucks

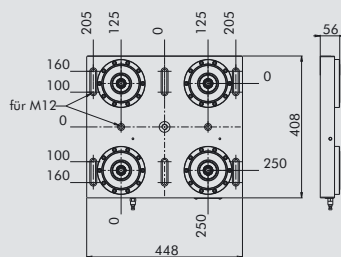


Take 6 - pneumatic C 242 600

- 6x PSP chucks

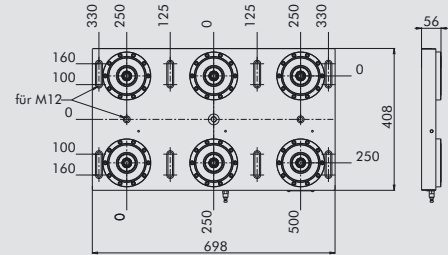



Take 4 - hydraulic C 265 400

- 4x HSP chucks

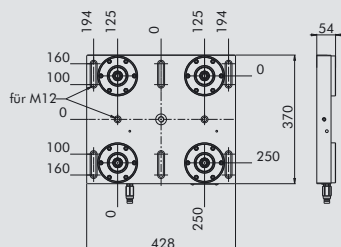

Take 6 - hydraulic C 265 600

- 6x HSP chucks

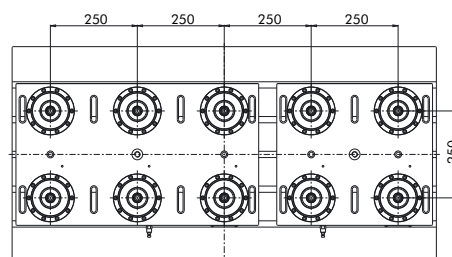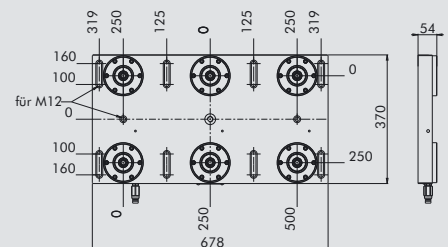

DELPHIN ACCESSORIES AND OPTIONS

The Delphin baseplate accessories for optimal equipment.

Set with 2 clamping spigots S 812 000

1 x C 282 000 (centring on 2 axes)
1 x C 282 100 (centring on 1 axis)



Set with 4 clamping spigots S 812 100

1 x C 282 000 (centring on 2 axes)
1 x C 282 100 (centring on 1 axis)
2 x C 282 200 (without centring)



Set with 6 clamping spigots S 812 200

1 x C 282 000 (centring on 2 axes)
1 x C 282 100 (centring on 1 axis)
4 x C 282 200 (without centring)



Chuck protection cover

Chip protection full-coverage.
Required clamping spigot:
C 282 000 (not in scope of delivery).
Material: aluminium, anodised

C 266 040

for HSP chuck
ø 139 x 20 mm

C 286 040

for PSP chuck
ø 159.5 x 20 mm



Spigot hole protection cover C 286 060

Chip protection for chuck, seals the centre bore and the Z-support of chuck remains usable.
Material: plastic
Dimensions: ø 28 x 32 mm
M8 thread for dismounting




Pallets with clamping spigots

Material: ground tool steel,
Centre distance: 250 mm


Pallet for 2 chucks

C 282 600
246 x 40 x 496 mm
with 2 clamping spigots



Pallet for 4 chucks


C 282 620
496 x 40 x 496 mm
with 4 clamping spigots



Hydraulic hand pump for HSP baseplates

C 287 120

Oil tank: 0,4 l
Pressure: max. 50 bar
Volume: 4,6 cm³
Weight: 3,5 kg

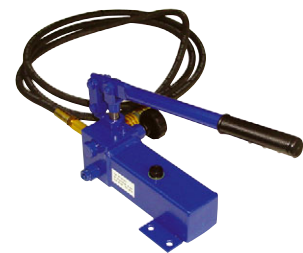

Air control unit for PSP baseplates C 810 720

Without function for Z cleaning.
Air pressure: 8 bar max.
Medium: dry, filtered compressed air in accordance with ISO 8573-1, Class 3.4.3 or better



Machine table fixing sets

Set with the necessary number of screws, washer and T-nuts for Take 4 or Take 6 baseplates.
Specify T-slot width with order.

for Take 4

C 289 180

for Take 6

C 289 190



Seal set for slotted holes

Set with the necessary number of seals for the slotted holes of the Take 4 or Take 6 baseplates.

for Take 4

S 820 040

for Take 6

S 820 060



System 3R International AB

Sorterargatan 1, SE-162 50 VÄLLINGBY

tel +46-08 620 20 00, fax +46-08 759 52 34, info.system3r@georgfischer.com

System 3R Schweiz AG

Wilerstrasse 98, CH-9230 FLAWIL

tel +41-071 394 13 50, fax +41-071 394 13 60, info.ch.system3r@georgfischer.com

System 3R Worldwide:

www.system3r.com